

# AOA-2458-59

Dual-band Outdoor Omni Antenna  
2.4GHz: 5dBi + 5GHz: 9dBi



AOA-2458-59-TS


AOA-2458-59-TSL

AOA-2458-59-TM


AOA-2458-59-TF

	AOA-2458-59-TS	AOA-2458-59TSL	AOA-2458-59-TM	AOA-2458-59TF
Frequency	2.4GHz ~ 2.5GHz 5.1GHz ~ 5.9GHz	2.4GHz ~ 2.5GHz 5.1GHz ~ 5.9GHz	2.4GHz ~ 2.5GHz 5.1GHz ~ 5.9GHz	2.4GHz ~ 2.5GHz 5.1GHz ~ 5.9GHz
Gain	2.4GHz: 5dBi 5GHz: 9dBi	2.4GHz: 5dBi 5GHz: 9dBi	2.4GHz: 5dBi 5GHz: 9dBi	2.4GHz: 5dBi 5GHz: 9dBi
Impedance	50 Ω	50 Ω	50 Ω	50 Ω
S.W.R	<= 2.0	<= 2.0	<= 2.0	<= 2.0
Radiation	Omni	Omni	Omni	Omni
Connector	RP-SMA male	RP-SMA male	N male	N female
Material	Fiber Glass	Fiber Glass	Fiber Glass	Fiber Glass
Length (with connector)	260 mm	260 mm	267 mm	260 mm


## Return Loss

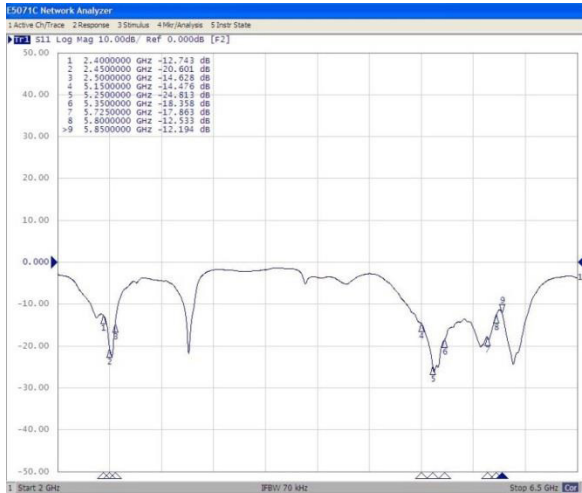

## VSWR

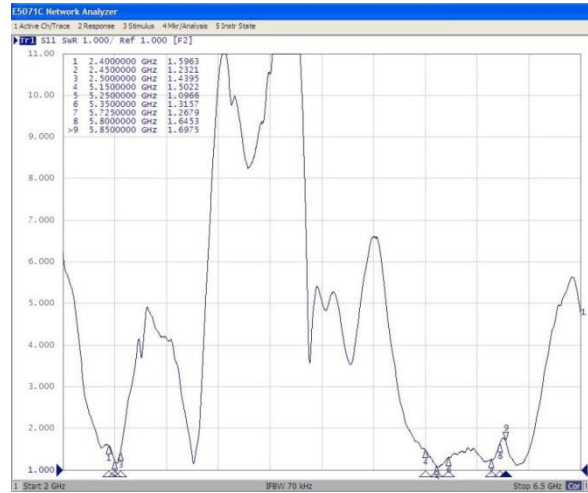

### 2.4GHz

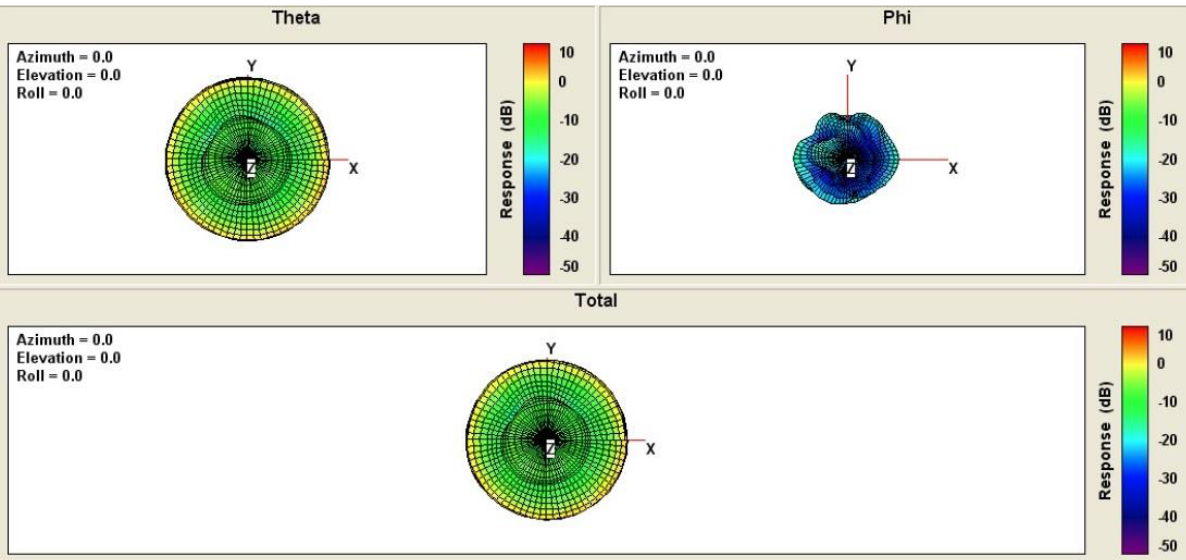

### 5GHz

